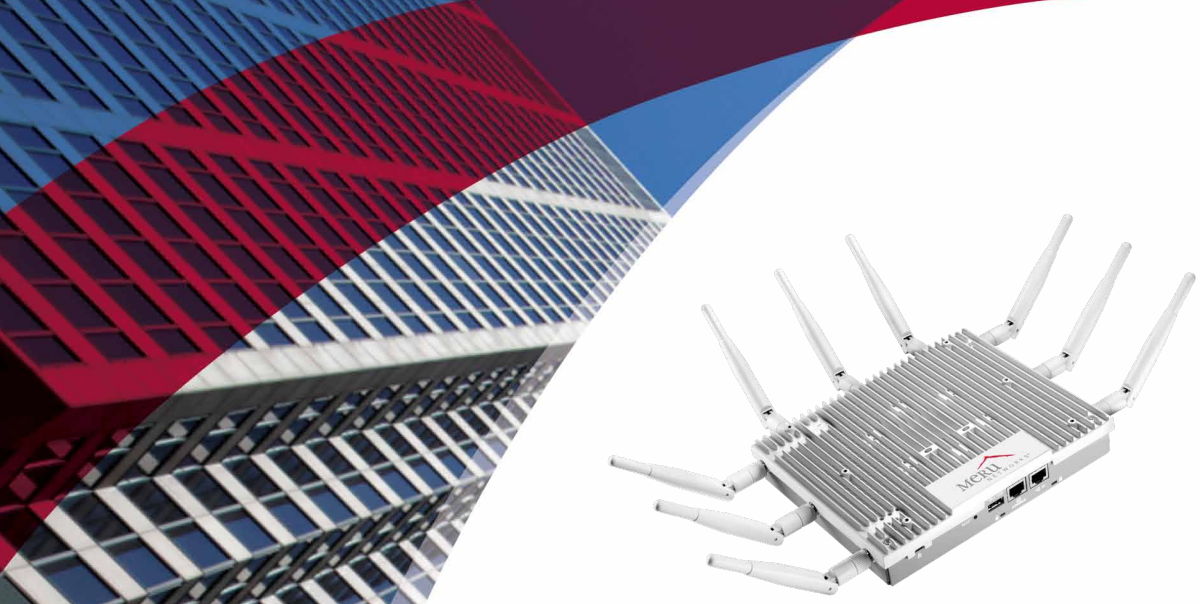

AP433e

Three-Radio, Three-Stream 802.11n Access Points

Re-architect the edge of your network and tackle the toughest wireless workloads

Featuring a three-radio, three-stream design, the AP433e taps the full potential of 802.11n standards to deliver in today's world of high client density and diversity, meeting the demand for wireless high-bandwidth and mobility applications.

Added radios boost the benefits of Channel Layering, multiplying capacity within a single access point or segregating mission-critical applications. Built for mobility applications, for example an industrial site or convention/arena, the AP433e defines the new network edge, preparing enterprises for the all-wireless workforce and the mobility of business-essential applications.

Designed for flexibility and to answer specific enterprise aesthetics requirements, the AP433e can be configured with optional antennas, including an external wall mount MIMO 3-Patch antenna and a ceiling mount MIMO panel antenna. The AP433e can also be mounted with a security lock directly on a suspended ceiling or a wall. And because the AP433e is plenum-rated, it can be hidden above a suspended ceiling.

Benefits

- Increased scalability and reliability through Meru's Virtualized Wireless LAN architecture and channel layering
- Support for Meru's Service Assurance Application Suite including: E[z]RF™ Network Manager, WIPS, and PCI Compliance Manager
- Supports all 802.11 a/b/g/n devices
- All radios support up to three streams — 3x3:3 802.11n support in both 2.4 GHz and 5 GHz frequency bands

TECHNOLOGY:	MAX DATA RATE:	CONNECTIVITY:
Patented Virtualized Wireless LAN	1.35 Gbps	380 clients

For more information about the AP433e, visit **www.merunetworks.com**

AP433e

TECHNICAL SPECIFICATIONS

APPLICATION SUPPORT AND OVER-THE-AIR QoS

SIP Support
Dynamic out-of-the-box support for SIP applications and codecs

QoS
Configurable dynamic QoS rules
Over-the-air resource reservation
Automatic, stateful flow detectors for SIP
Configurable QoS rules for SIP, Ascom, Avaya, Microsoft, Polycom's SVP, Siemens, ShoreTel, Vocera, and Cisco SCCP
User-configurable static and dynamic QoS rules per application (user-defined) and per user (stations, users, and port numbers)
Call admissions control and call load balancing
WMM support
WMM rate adaptation, optimized based on real-time network conditions

SECURITY

Authentication
Combination of captive portal, 802.1x, and open authentication
Advanced security using WPA2
802.1x with EAP-Transport Layer Security (EAP-TLS), Tunneled TLS (EAP-TTLS), Protected EAP (PEAP), MS-CHAPv2, Smartcard/ Certificate, Lightweight EAP (LEAP), EAP-FAST, EAP-MD5, EAP-SIM and EAP-AKA, with mutual authentication and dynamic, per-user, per-session unicast and broadcast keys
Secure HTTPS with customizable captive portal utilizing RADIUS

Encryption Support
Static and dynamic 40-bit and 128-bit WEP keys, TKIP with MIC, AES

Security Policy
RADIUS-assisted, per-user and per-ESSID access control via MAC filtering
Multiple ESSID/BSSID, each with flexibility of separate and shared security policy

Rogue Detection and Suppression
All radios capable of scanning 802.11n, 802.11a, and 802.11b/g for rogue devices

MOBILITY

Zero-Loss Handoffs
Infrastructure-controlled, zero-loss handoff mechanism for standard Wi-Fi clients

CENTRALIZED MANAGEMENT

Zero Configuration
Automatically selects power and channel settings
Automatically discovers controllers and download configuration settings
Zero-touch, plug-and-play deployments

System Management
Centralized and remote management and software upgrades via System Director web-based GUI, SNMP, command-line interface (CLI) via serial port, SSH, Telnet, centrally managed via E(z)RF™ Network Manager
Centralized security policy for WLAN, multiple ESSIDs, and VLANs with their own administrative/security policies

Intelligent RF Management
Coordination of access points with load balancing for predictable performance
Centralized auto-discovery, auto-channel configuration, and auto-power selection for APs
Co-channel interference management

WIRELESS SPECIFICATIONS

Wireless Standards
IEEE 802.11 a/b/g/n, IEEE 802.11i support (AES, WEP, WPA, WPA2), IEEE 802.11e, WMM

Power
Optimal power control in 1 dBm increments
Ability to disable unused radios via software to lower power consumption

Antenna
Two integrated Orthogonal Array Beam Forming antenna systems
Standard Antenna Gain ~ 2 dBi for 2.4 GHz and 3 dBi for 5 GHz
Antenna gain not included in Average Transmit Power specified

Client Support
Support for clients that perform active scanning and passive scanning
Support for clients that pre-authenticate
Support for clients that change to and from power-save mode rapidly
Power-save mode for clients in both QoS mode and non-QoS mode

IEEE 802.11n

Frequency Band
2.412 to 2.472 GHz, 5.18 to 5.32 GHz, 5.5 to 5.825 GHz
(frequency range per country codes)

Operating Channels
1 through 11 for 2.4 GHz band (Americas, 1–13 all others)
36 through 165 for 5 GHz band (per country codes)

Data Rates (800 nS GI Mbps/400 nS GI Mbps)
20 MHz: 195.0/216.7, 175.5/195.0, 156.0/173.3, 130.0/144.4, 117.0/130.0, 104.0/115.6, 78.0/86.7, 65.0/72.2, 58.5/65.0, 52.0/57.8, 39.0/43.3, 26.0/28.9, 19.5/21.7, 13.0/14.4, 6.5/7.2 Mbps
40 MHz: 405.0/450.0, 364.5/405.0, 324.0/360.0, 270.0/300.0, 243.0/270.0, 216.0/240.0, 162.0/180.0, 135.0/150.0, 121.5/135.0, 108.0/120.0, 81.0/90.0, 54.0/60.0, 40.5/45.0, 27.0/30.0, 13.5/15.0 Mbps

Average Transmit Power
2.4n (20 HT) MCS0/8/16: 21 dBm; 2.4n (40 HT) MCS0/8/16: 20 dBm
2.4n (20 HT) MCS7/15/23: 17 dBm; 2.4n (40 HT) MCS7/15/23: 16 dBm
5.0n (20 HT) MCS0/8/16: 18 dBm; 5.0n (40 HT) MCS0/8/16: 17 dBm
5.0n (20 HT) MCS7/15/23: 15 dBm; 5.0n (40 HT) MCS7/15/23: 14 dBm

Receive Sensitivity (for max data rates)
2.4n (20 HT) MCS0/8/16: -92 dBm; 2.4n (40 HT) MCS0/8/16: -93 dBm
2.4n (20 HT) MCS7/15/23: -76 dBm; 2.4n (40 HT) MCS7/15/23: -74 dBm
5.0n (20 HT) MCS0/8/16: -93 dBm; 5.0n (40 HT) MCS0/8/16: -92 dBm
5.0n (20 HT) MCS7/15/23: -75 dBm; 5.0n (40 HT) MCS7/15/23: -71 dBm

IEEE 802.11a

Frequency Band
5.180–5.240 GHz: 8 channels (34, 36, 38, 40, 42, 44, 46, 48); 5.280–5.320 GHz: 4 channels (52, 56, 60, 64); 5.745–5.825 GHz: 5 channels (149, 153, 157, 161, 165); 5500–5700: 11 channels (100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140)

Operating Channels
Configurable based on country regulations

Data Rates
54, 48, 36, 24, 18, 12, 9, and 6 Mbps with automatic rate adaptation

Transmit Power
19 dBm at 6 Mbps and 16 dBm at 54 Mbps

Receive Sensitivity
-81 dBm at 54 Mbps and -93 dBm at 6 Mbps

IEEE 802.11b/g

Frequency Band
Hardware supports 2.40–2.50 GHz: 2.4–2.4835 GHz (US, Europe), 2.4–2.497 GHz (Japan only)

Operating Channels
1–11 US/Canada, 1–13 Europe, and 1–14 Japan
3 non-overlapping channels

Transmit Power
17–21 dBm

802.11b Data Rates
11, 5.5, 2, and 1 Mbps with automatic rate adaptation

802.11g Data Rates
54, 48, 36, 24, 18, 12, 9, and 6 Mbps with automatic rate adaptation

802.11b/g Receive Sensitivity
-80 dBm at 54 Mbps, -90 dBm at 11 Mbps, -90 dBm at 6 Mbps, and -92 dBm at 1 Mbps

PHYSICAL SPECIFICATIONS

Dimensions
7.85" length × 6.5" width × 1.4" height
(19.9 cm length × 16.5 cm width × 3.6 cm height)

Weight
2 lbs 4 oz (1.62 kgs)

Power
802.3at PoE for 3-radio operation and 802.3af for 2-radio operation
Draws 12.95W to 18W depending on configuration

Environmental
Operating temperature: 0° to 50° C (32° F to 122° F)
Operating humidity: 90% (non-condensing)
Storage temperature: -10° to +70° C ambient
Storage humidity: 95% (non-condensing)

Interfaces
One auto-sensing 10/100/1000 Base-TX Ethernet (RJ-45)
Three dual-band radios support any combination of 802.11a/b/g/n
USB port

Standard Warranty
Limited lifetime warranty

Mounting Options
Suspended ceiling and wall-mounting bracket with security lock (included), recessed ceiling bracket (option), interlude ceiling bracket (option)

AP433e Part Numbers

Contact your representative for details

Certifications

Wi-Fi Certified a/b/g/n

Radio
FCC Part 15.247;
FCC Part 15.407 (US); RSS-210 (Canada);
EN 300 328; ARIB STD-T66; IDA
RCR STD-33; ARIB STD-T71 (Japan);
EN 301 893(EU)

Safety
UL 60950-1; IEC 60950-1;
EN 60950-1; CAN/CSA-C22.2
No. 60950-1

Emissions
EN 55022 Class B; EN 55024;
EN 60601-1-2; EN 301 489-1;
EN 301 489-17; ICES-003 Class B;
FCC Part 15, Class B

Meru delivers an all-wireless network that fully supports the enterprise, delivering a consistent, interactive experience for all users. No matter what applications they are running. No matter how many other users are on the network.

For more information about the Meru AP433e, visit www.merunetworks.com or email your questions to: info@merunetworks.com

Meru Networks | Copyright © 2012 Meru Networks, Inc. All rights reserved worldwide. Meru Networks is a registered trademark of Meru Networks, Inc. All other trademarks, trade names, or service marks mentioned in this document are the property of their respective owners. 03.12 DS1001.US

Corporate Headquarters
894 Ross Drive, Sunnyvale, CA 94089
T +1 (408) 215-5300
F +1 (408) 215-5301
E info@merunetworks.com